



## CC-MAX® Elevator Bucket

High Speed Centrifugal Discharge 210 - 900 FPM


The CC-MAX Heavy Duty elevator bucket is a grade above older CC style buckets. It has the traditional shape, fill and discharge characteristics, with the thicker wear surfaces our buckets are famous for. The result is longer life and greater performance. CC-MAX buckets are direct replacements for CC and other standard bucket styles. Standard spacing is nominal projection plus 2" inches. Exceptional performance in most agricultural applications.

### Features

- Thicker lip - up to 20%
- Thicker corners - up to 20%
- More capacity - up to 5%
- Clean discharge
- High impact and abrasion resistant
- Non-corrosive non-sparking

### Benefits

- Longer bucket life
- Increase and maintain capacity longer
- Move bulk materials faster
- Decreases elevator down-time
- Corrosion resistant
- Lowers freight rates by efficient packaging
- Resists hang-ups

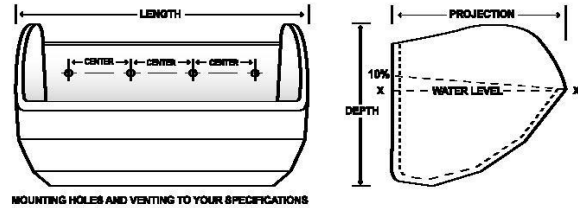

## CC-MAX® Elevator Bucket

BUCKET SIZE, INCHES**					PUNCHING, INCHES			WEIGHT, LBS	CAPACITY, CU. INCHES			
Bucket Size	Length	Proj.	Depth	Backwall Thickness	Centers	Number of Holes	Bolt Size	(Poly) H.D.P.E.	Water Level X-X	Water Level +10%	Standard Spacing	Carton Qty
5 x 4	5-1/2	4-1/2	4-1/4	0.21	3-3/16	2	1/4	0.53	38.30	42.13	6	30
6 x 4	6-1/2	4-1/2	4-1/4	0.21	4-3/8	2	1/4	0.58	45.38	49.92	6	30
7 x 4	7-1/2	4-1/2	4-1/4	0.21	2-11/16	3	1/4	0.65	52.10	57.31	6	30
6 x 5	6-1/2	5-1/2	5	0.26	4-3/8	2	1/4	0.89	70.87	77.96	7	16
7 x 5	7-1/2	5-1/2	5	0.26	2-11/16	3	1/4	0.99	80.75	88.83	7	14
8 x 5	8-1/2	5-1/2	5	0.26	3-1/16	3	1/4	1.10	90.85	99.94	7	24
9 x 5	9-1/2	5-1/2	5	0.26	3-5/8	3	1/4	1.18	100.99	111.09	7	24
8 x 6	8-9/16	6-5/8	6	0.27	3-1/16	3	1/4	1.40	136.00	149.60	8	18
9 x 6	9-9/16	6-5/8	6	0.27	3-5/8	3	1/4	1.52	149.19	164.11	8	18
10 x 6	10-9/16	6-5/8	6	0.27	4-1/8	3	1/4	1.64	166.89	183.58	8	18
11 x 6	11-9/16	6-5/8	6	0.27	3	4	1/4	1.73	180.62	198.68	8	18
12 x 6	12-9/16	6-5/8	6	0.27	3-3/8	4	1/4	1.91	200.76	220.83	8	18
13 x 6	13-9/16	6-5/8	6	0.27	3-5/8	4	1/4	2.13	215.00	236.50	8	18
10 x 7	10-9/16	7-7/8	7	0.32	4-1/8	3	5/16	2.35	236.00	259.60	9	12
11 x 7	11-9/16	7-7/8	7	0.32	3	4	5/16	2.44	247.74	272.52	9	12
12 x 7	12-9/16	7-7/8	7	0.32	3-3/8	4	5/16	2.63	267.27	293.99	9	12
13 x 7	13-9/16	7-7/8	7	0.32	3-5/8	4	5/16	2.78	288.12	316.93	9	12
14 x 7	14-9/16	7-7/8	7	0.32	3	5	5/16	2.94	303.57	333.93	9	12
15 x 7	15-9/16	7-7/8	7	0.32	3-1/4	5	5/16	3.10	335.00	368.50	9	12
16 x 7	16-9/16	7-7/8	7	0.32	2-7/8	6	5/16	3.29	350.87	385.95	9	12
12 x 8	12-9/16	8-7/8	8-1/4	0.35	3-3/8	4	5/16	3.25	373.00	409.00	10	9
14 x 8	14-9/16	8-7/8	8-1/4	0.35	3	5	5/16	3.76	435.07	478.58	10	9
16 x 8	16-9/16	8-7/8	8-1/4	0.38	2-7/8	6	5/16	4.30	515.62	567.18	10	9
18 x 8	18-9/16	8-7/8	8-1/4	0.39	3-1/8	6	5/16	4.79	580.61	638.67	10	9
20 x 8	20-9/16	8-7/8	8-1/4	0.42	3-1/2	6	5/16	5.85	655.00	720.00	10	9

## CC-MAX® LOW PROFILE

SIZE	CAPACITY	
Depth	Minimum Spacing	Water Level + 3%
2-3/4	3	40.22
2-3/4	3	47.65
2-3/4	3	54.70
3-3/4	4	74.41
3-3/4	4	84.79
3-3/4	4	95.39
3-3/4	4	106.04
4-3/4	5	142.80
4-3/4	5	156.65
4-3/4	5	175.23
4-3/4	5	189.65
4-3/4	5	210.79
4-3/4	5	225.75
5-3/4	6	247.80
5-3/4	6	260.13
5-3/4	6	280.63
5-3/4	6	302.53
5-3/4	6	318.75
5-3/4	6	351.75
5-3/4	6	368.41
6-3/4	7	391.65
6-3/4	7	456.83
6-3/4	7	541.40
6-3/4	7	609.64
6-3/4	7	688.00

\* Actual dimensions may vary slightly on all elevator buckets, depending on specified raw material.

■ - Indicates HD-MAX and CC-MAX punch patterns differ.

■ - Indicates new sizes.

332 Packham Avenue  
Saskatoon, SK  
S7N 2T1  
Ph: (306) 244-2285  
Fx: (306) 244-4066  
Toll-Free 800-644-8397

